


## VAR135-2-100-5.0 lead

Radiation-proof, lightweight lining, with on one side two times a VarioShield<sup>Basic</sup> or VarioShield<sup>Plus</sup> panel fitted with lead.


VarioShield has developed an innovative system, VarioShield<sup>Plus</sup>. These small (1200 mm long, 600 mm wide) VarioShield<sup>Plus</sup> panels have a special overlap that ensures you can build walls that are guaranteed radiation proof. These panels are also easy to handle thanks to their low weight.



VarioShield<sup>Plus</sup>

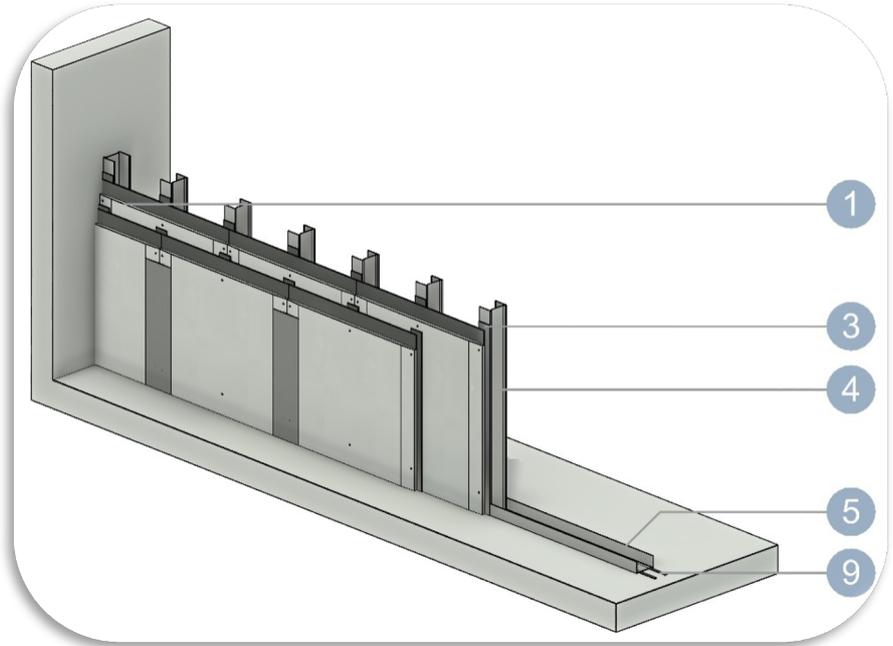

SYSTEM PERFORMANCE	System thickness [mm]	System weight [kg/m <sup>2</sup> ]
	135	44
Sound insulation	Sound insulation R <sub>w</sub> (C;C <sub>tr</sub> ) Simulation	
	46dB (-1;-3)	
Maximum height stability (DIN 18183-1)	Field of application I [mm]	Field of application II [mm]
	5100	4200
Radiation proof	Applus RTD Benelux Report	
	9287-112321/001/1/2015 rev. 0	

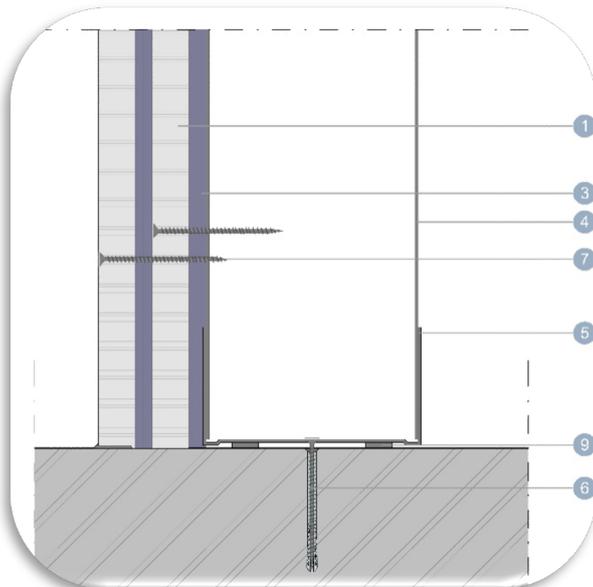

### System structure:

1. VarioShield<sup>Basic</sup> or VarioShield<sup>Plus</sup> with lead 2.5 and 2.5 mm
3. Self-adhesive lead strips 2.5 mm and 2.5 mm
4. C-profile 100 mm centre-to-centre 300 / 600 mm
5. U-profile 100 mm
6. U-profile attachment on building construction
7. VarioShield screw 45 mm, centre-to-centre 250 mm
8. Insulation not necessary
9. Acoustic felt

For more information, please refer to our installation advice, documentation, reports and website.