


## VAR80-2-50-2.5 lead

Radiation-proof, lightweight lining, with on one side VarioShield<sup>Basic</sup> or VarioShield<sup>Plus</sup> panel fitted with lead and a Standard Plasterboard.


VarioShield has developed an innovative system, VarioShield<sup>Plus</sup>. These small (1200 mm long, 600 mm wide) VarioShield<sup>Plus</sup> panels have a special overlap that ensures you can build walls that are guaranteed radiation proof. These panels are also easy to handle thanks to their low weight.



**VarioShield<sup>Plus</sup>**

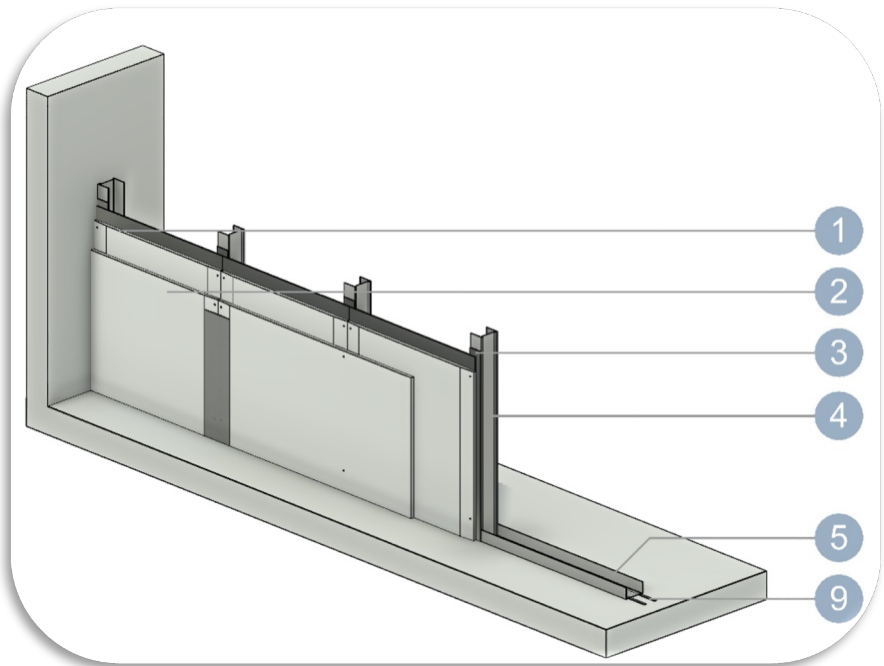

SYSTEM PERFORMANCE	System thickness [mm]	System weight [kg/m²]
	80	49
Sound insulation	Sound insulation Rw (C;C <sub>tr</sub> ) Simulation	
	42dB (-1;-3)	
Maximum height stability (DIN 18183-1)	Field of application I [mm]	Field of application II [mm]
	2600	-
Radiation proof	Applus RTD Benelux Report	
	9287-112321/001/1/2015 rev. 0	

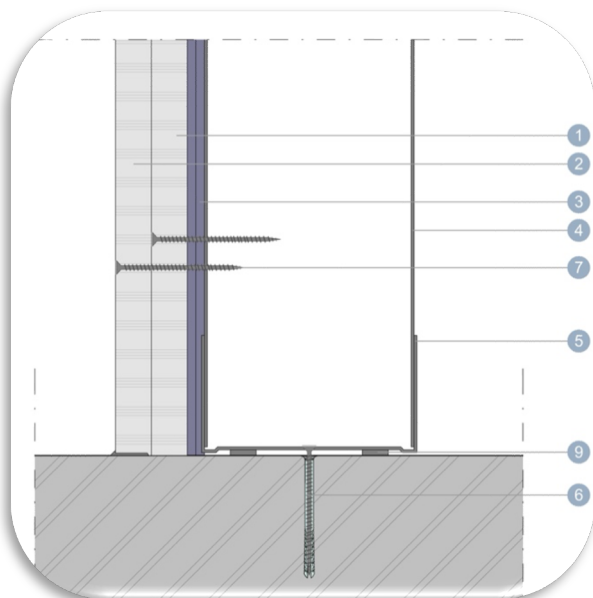

### System structure:

1. VarioShield<sup>Basic</sup> or VarioShield<sup>Plus</sup> with lead 2.5 mm
2. Standard Plasterboard 12.5mm
3. Self-adhesive lead strips 2.5 mm
4. C-profile 50 mm centre-to-centre 600 mm
5. U-profile 50 mm
6. U-profile attachment on building construction
7. VarioShield screw 45 mm, centre-to-centre 250 mm
8. Insulation not necessary
9. Acoustic felt

For more information, please refer to our installation advice, documentation, reports and website.